



High Efficiency Rooftop Unit

UATQ-CGXY1U
15-25 Ton

Cooling Only 50Hz

High Ambient

R-410A



هيئة الإمارات للمواصفات والمقاييس
Emirates Authority For Standardization & Metrology



Exceptional performance in a compact design



Main Features

UATQ-CGXY1U series comes with high efficiency scroll compressors, optimized heat exchangers and high-performing fans which enables the unit to deliver top performance in both standard and high ambient temperature conditions.

High Ambient Design

Specially designed to deliver top performance in both standard and high ambient temperature conditions, in terms of capacity and efficiency. Less than 15% capacity deterioration at T3 with continuous operation up to 52°C.

External third party testing

The UATQ-CGXY1U series have undergone stringent third party testing by Intertek, an internationally recognized certification body, to verify on its designed performance data.


Wide operating range

UATQ-CGXY1U series rooftops are specifically designed for high ambient application and are capable of operating at an outdoor ambient of up to 52°C.



Auto random restart

When the unit stops suddenly due to power failure during operation, it will automatically restart in last setting condition once the power is resumed. However, the compressors will restart randomly if more than one unit is installed under the same phase of power.

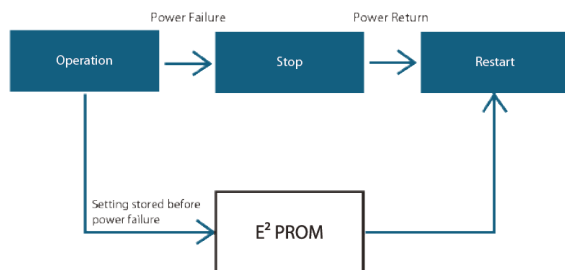

**This feature can be deactivated.*

Compact and light

The flat top design of the unit allows for maximum utilization of warehouse and container space, while the light frame ensures ease of handling and installation.

External service

Pressure can be checked without opening the unit.

Indoor air quality

- » The standard washable filter can easily be accessed for facilitated maintenance.
- » An additional field supplied filter can easily be installed on the 2 inch rail to meet the indoor air quality requirements of the application.

Flexibility of air supply

A belt driven fan is used such that the air volume and static pressure needed can be adjusted according to the requirements. This flexibility allows for wider application and offers the possibility to reach the best working conditions considering the unit's characteristics.

Anti-corrosion heat exchanger

Hydrophilic Gold Fin coated coil is offered as a standard coil to further prolong unit life span

Controller Features

- » Aesthetic outlook
- » Clear and wide display with screen size for 45mm x 70mm
- » Room temperature display
- » Backlight display
- » Set temperature display
- » Clock (time) display
- » LED ON/OFF indicator
- » 7 days programmable timer
- » Error code display
- » Key lock function
- » IR receiver (interaction with wireless controller)
- » ESMA compliant

Phase Protection

A three-phase line monitor module protects the unit components against phase loss, phase reversal and phase unbalance.

Independent Staged Cooling

The unit is designed with two independent refrigerant circuits, each controlled separately for maximum part load efficiency and durability.



Coil Guard

The condenser coil is protected by a coil guard to prevent accidental damage during transportation, handling and installation.

Dust Proof Sealed Bearings

Ensures the reliability of outdoor motor and smooth operation all year round.



BRC51D65


Component Features

1 Unit casing is made of zinc coated galvanized steel sheets. It is further coated with electrostatic powder coat and then are fastened with zinc plated screws to further prevent unit from rusting.

2 The unit comes with Double Width Double Inlet (DWDI) centrifugal, forward curved type blower. It is mechanically, dynamically balanced and mounted on a rigid shaft in a self-aligned bearing block. The belt driven evaporator motor allows the change of pulley on-site to accommodate different static pressure and air flow requirement.

3 The unit comes with saranet pre-filter as a standard 2 inches rail for return air filters is provided as standard for field supplied filter casement installation. The sheet metal condensate drain pan is powder coated to prevent corrosion.

4 Evaporator and condenser coils are made of seamless inner grooved copper tubes which will be mechanically transfer. All coils are tested against leakage by nitrogen holding at 609psig and highly precise helium leak test at 235psig. Hydrophilic Gold Fin coated coil is offered as a standard coil to further prolong unit life span under corrosive environment. Coil guard is incorporated to protect heat exchanger from accidental damage which will happen during transportation, handling and installation.

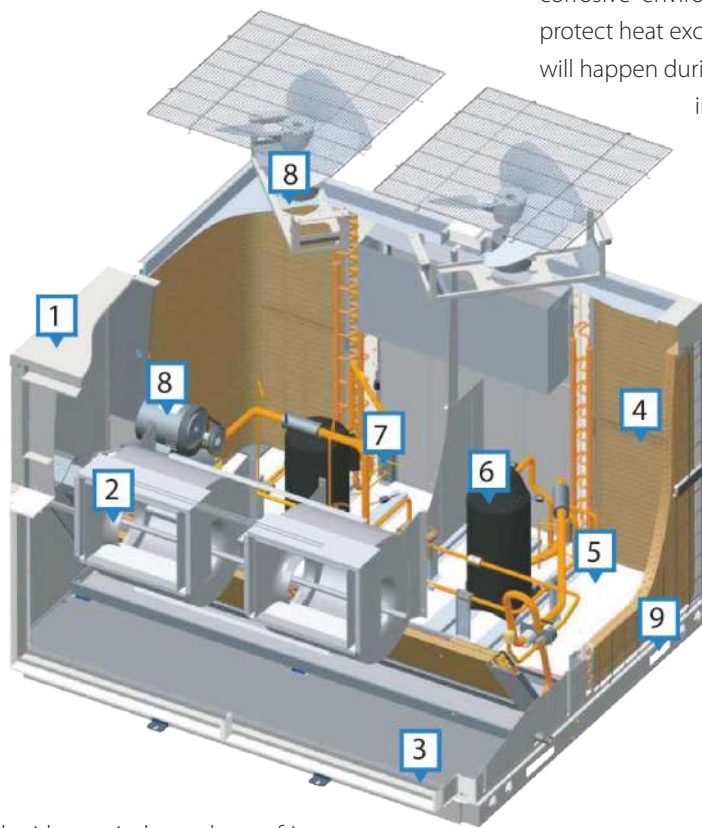

5 Each unit is designed with two independent refrigerant circuit. It allows the system perform optimum part loading with independent Thermal Expansion Valve (TXV), filter drier and high/low pressure switch.

6 The high efficiency, low noise and hermetically sealed scroll compressor are used in UATQ-C series to give it the highest possible performance. All compressors are equipped with an internal overload protection and crankcase heaters as standard.

7 Additional valves are provided for site installation of pressure gauge and low ambient kit.

8 The evaporator and condenser fan motor used in UATQ-C series are rated IP55 protection index with Class B and Class F insulation respectively. The condenser fan motor is designed with dust proof bearing to further enhance durability and smooth operation all year round.

9 The rooftop foundation is rigid, with dedicated holes for forklifting and rigging. This is for better handling during transportation and installation.

Rooftop Application



NetPro Dual (Modbus Gateway)

NetPro Dual enables air-conditioner (A/C) to interact with BMS systems

✓ Advantages

- » Short installation time, simple setup and convenient operation
- » Does not require highly trained installers
- » No Independent power supply required
- » Complete with casing cover
- » Enable management to monitor and control A/C effectively and efficiently



NetPro Dual (Modbus Gateway)



Modbus function codes are as below:

Addresses	Addresses	Addresses	Addresses
30 xxx	R	Modbus status	Indicate Modbus readiness
	R	Indoor unit connection status	Indicate connection status
31xxx	R	Indoor unit cooling setpoint	Indicate minimum and maximum setpoint (cooling)
	R	Indoor unit heating setpoint	Indicate minimum and maximum setpoint (heating)
32 xxx	R	On/off status and fan speed	Indicate unit on/off status and fan speed selection
	R	Operation mode	Indicate operation mode
	R	Indoor unit setpoint	Indicate unit setpoint
	R	Error code	Indicate error type
	R	Room temperature	Indicate room temperature measured
	R	Indoor unit temperature sensor	Indicate unit temperature sensor
	R	Compressor status	Indicate compressor status
42 xxx	W	On/off status and fan speed	Write unit on/off status and fan speed selection
	W	Operation mode	Write operation mode
	W	Set temperature	Write set temperature

Technical Specifications

Model			UATQ180CGXY1U	UATQ210CGXY1U	UATQ240CGXY1U	UATQ300CGXY1U
Cooling T1 ⁽¹⁾ 35°C (Nominal)	Capacity	Btu/h	175,000	209,300	234,600	285,000
	Capacity	kW	51.3	61.3	68.8	83.50
	EER	(Btu/h)/W	11.36	11.31	11.31	11.16
	EER	W/W	3.33	3.31	3.31	3.27
	PI	kW	15.40	18.50	20.74	25.54
Cooling T3 ⁽²⁾ 46°C (Nominal)	Capacity	Btu/h	153,000	181,000	202,300	243,000
	Capacity	kW	44.8	53.0	59.3	71.2
	EER	Btu/h	8.27	8.27	8.33	8.03
	PI	kW	18.50	21.88	24.30	30.25
Evaporator External Static Pressure		Pa	50-500	50-500	50-500	50-500
Airflow		cfm	7000	7600	8000	9000
Outdoor Sound Performance	Sound Pressure	dBA	68	69	70	72
	Sound Power	dBA	87	89	89	92
Dimensions	Height	mm	1,690	1,650	1,650	1,950
	Width	mm	1,988	2,430	2,430	2,430
	Depth	mm	2,079	2,190	2,190	2,210
Weight	Net	kg	840	930	940	1,090
	with Packing	kg	870	970	980	1,130
Operation Range	Cooling	°CDB	19-52			
Refrigerant			R-410A			
Power Supply		V/Ph/Hz	380-415/3/50			

(1) Rated cooling capacity based on 27°CDB/19°CWB indoor and 35°CDB outdoor

(2) Rated cooling capacity based on 29°CDB/19°CWB indoor and 46°CDB outdoor



Powerful Cooling

Rapid cooling and powerful, even if outside temperature is very high



Energy Saving

Daikin offers efficient operation on its equipment for lower electricity consumption. This also contributes to reduced CO₂ emissions.



Tropical Compressor

The tropical compressor is able to handle and operate fully under extreme weather conditions.



R-410A

Zero ozone depletion potential for a reduced impact on the environment



User-Friendly

Easy installation, easy operating procedures and friendly shape buttons.



www.daikinmea.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin MEA. Daikin MEA has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin MEA explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin MEA.

DAIKIN MIDDLE EAST AND AFRICA FZE

P.O. Box 18674, Plot MO0426, JAFZA North, Jebel Ali Free Zone, Dubai, UAE | Tel: +971 (0) 4 815 9300 | Fax: +971 (0) 815 9311

E-mail: info@daikinmea.com Web: www.daikinmea.com Toll Free: 800-DAIKIN (324546)



DMEA22-084UAE